

EMISON
acoustique

CMS 600 MONITOR



on foot

MULTIPLE APPLICATIONS

thanks to its high performances, the CMS600 is usable as well on foot in a small frontage, or on stage monitor reference.

***MULTI APPLICATIONS** grace à ses hautes performances, le CMS 600 est aussi bien utilisable en petite facade, sur pied ou en moniteur de scène de référence.*

15" neodymium driver

2" neodymium driver

**Constant directivity
90° x 60° waveguide**

Passive crossover

Ergonomic design

Light weight



stage monitor

High performance monitor

CMS 600

CMS 600

Technical data

power handling : 800 W AES


nominal impedance: 8 Ohms

sensitivity: 100 dB/1W/1m

maxi SPL: 130dB/1m

directivity: 90°H x 60°V

frequency response: 75-16000Hz+-3dB

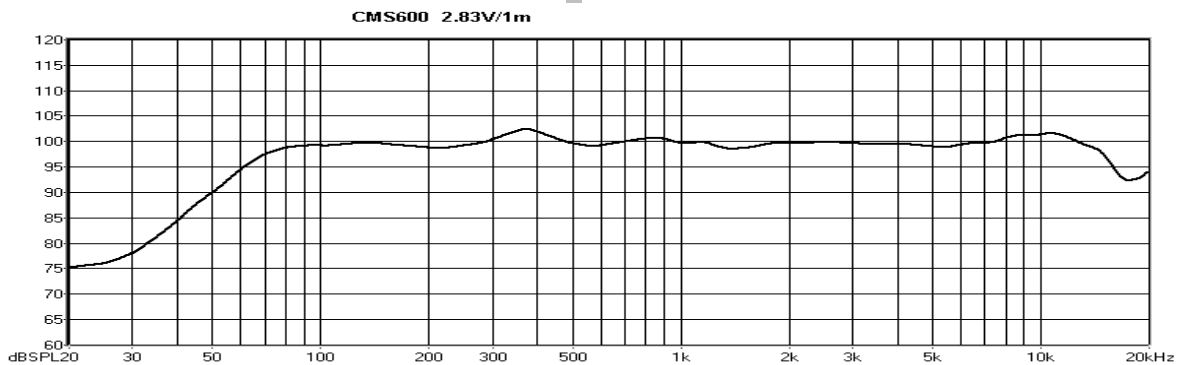

optional flight case for 2 CMS600

Product specifications

Dimensions : Height: 70cm
Width 43cm
Depth 42cm

Net weight : 30kg

Finish Dark grey acrylic paint

Connectors Neutrik Speakon NL4

Cabinet construction Baltic Birch plywood

Horn Fiberglass

Front finish Acoustic foam & grille

Handling 2 ergonomic handles

spécifications can change without notice